



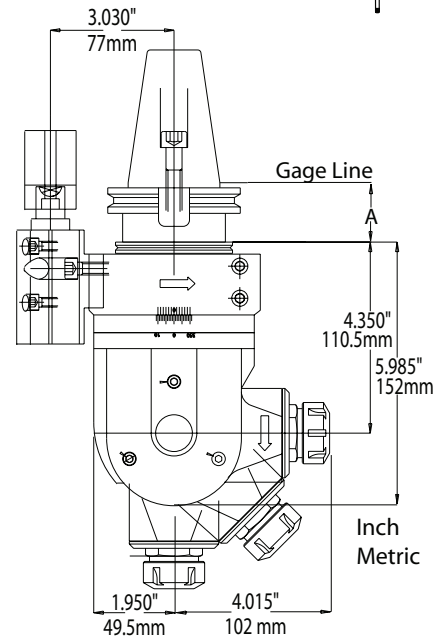

Universal CNC Adjustable Angle Head

PLCNC-AAH25

- 4000 RPM max.
- ER25 Collet System
- Capable of machining in two axial positioning angles
- Designed to perform any CNC medium duty operations
- Interchangeable spindle taper holder for CAT, ISO & BT Spindles

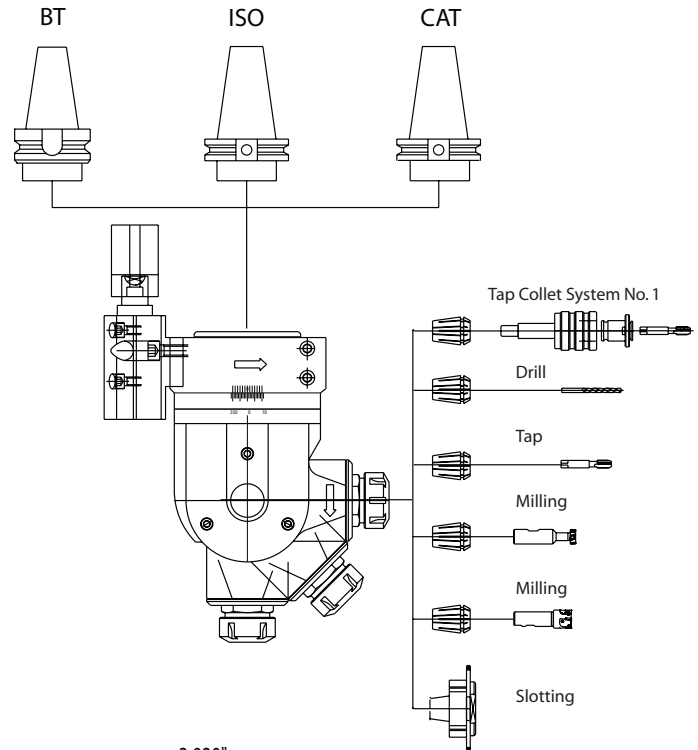

Shank Style	Description	UPC 733101-	Torque		Driving Ratio	Max RPM	A Gage Line		Collet Size	Max. Tool Cap. Dia.		Max. Tap Size		*Max Slotting Cutter I.D.		**Weight	
			Nm	lb.ft			in	mm		in	mm	in	mm	in	mm	Kg	Lb
ISO40-DIN2080	PLCNC-AAH-ER25-40DIN2080	45950	15	11	1 To 1	4000	0.520	13.2	ER25	0.625	16	0.625	16	1.250	32	6.5	14.3
ISO40-DIN69871	PLCNC-AAH-ER25-40DIN69871	45951					1.378	35									
BT40	PLCNC-AAH-ER25-BT40	45952					1.457	37									
CAT40	PLCNC-AAH-ER25-CAT40	45953					1.378	35									
ISO50-DIN2080	PLCNC-AAH-ER25-50DIN2080	45954					0.724	18.4									
ISO50-DIN69871	PLCNC-AAH-ER25-50DIN69871	45955					1.457	37									
BT50	PLCNC-AAH-ER25-BT50	45956					2.047	52									
CAT50	PLCNC-AAH-ER25-CAT50	45957					1.457	37									

CNC Adjustable Angle Heads with HSK shanks can be made as a special order upon request.

** The weights of the angle heads do not include spindle taper holders.
* Use with Dorian Slotting Cutter Holder PG 14.