




## PLCNC-AAH32

- 3500 RPM max.
- ER32 Collet System
- Designed to perform any CNC heavy duty operations
- Capable of machining in two axial positioning angles
- Interchangeable spindle taper holder for CAT, ISO & BT Spindles

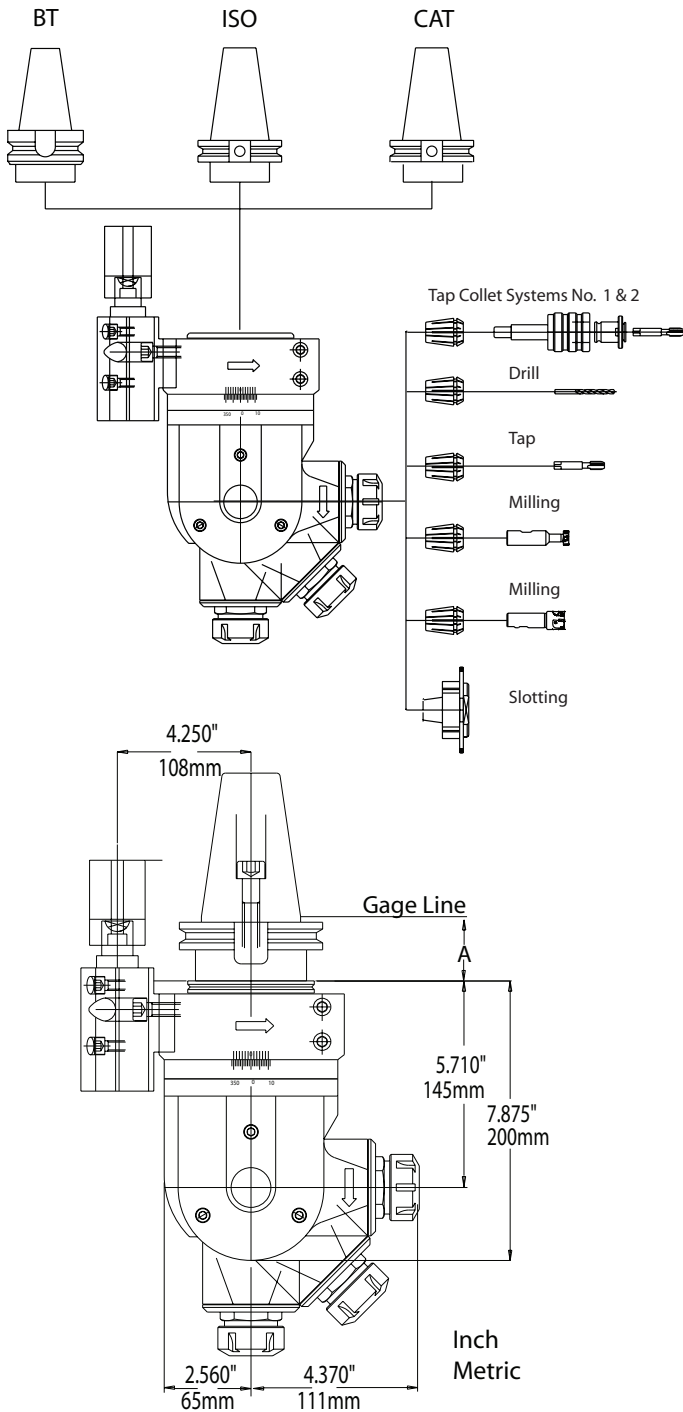

| Shank Style    | Description               | UPC<br>733101- | Torque |       | Driving<br>Ratio | Max<br>RPM | A<br>Gage Line |      | Collet Size | Max. Tool<br>Cap. Dia. |    | Max. Tap Size |    | *Max Slotting<br>Cutter I.D. |    | **Weight |      |
|----------------|---------------------------|----------------|--------|-------|------------------|------------|----------------|------|-------------|------------------------|----|---------------|----|------------------------------|----|----------|------|
|                |                           |                | Nm     | lb.ft |                  |            | in             | mm   |             | in                     | mm | in            | mm | in                           | mm | Kg       | Lb   |
| ISO40-DIN2080  | PLCNC-AAH-ER32-40DIN2080  | 45940          | 40     | 29.5  | 1 to 1           | 3500       | 0.520          | 13.2 | ER32        | 0.750                  | 20 | 0.812         | 20 | 1.500                        | 40 | 21       | 46.2 |
| ISO40-DIN69871 | PLCNC-AAH-ER32-40DIN69871 | 45941          |        |       |                  |            | 1.378          | 35   |             |                        |    |               |    |                              |    |          |      |
| BT40           | PLCNC-AAH-ER32-BT40       | 45942          |        |       |                  |            | 1.457          | 37   |             |                        |    |               |    |                              |    |          |      |
| CAT40          | PLCNC-AAH-ER32-CAT40      | 45943          |        |       |                  |            | 1.378          | 35   |             |                        |    |               |    |                              |    |          |      |
| ISO50-DIN2080  | PLCNC-AAH-ER32-50DIN2080  | 45960          |        |       |                  |            | 0.724          | 18.4 |             |                        |    |               |    |                              |    |          |      |
| ISO50-DIN69871 | PLCNC-AAH-ER32-50DIN69871 | 45961          |        |       |                  |            | 1.457          | 37   |             |                        |    |               |    |                              |    |          |      |
| BT50           | PLCNC-AAH-ER32-BT50       | 45962          |        |       |                  |            | 2.047          | 52   |             |                        |    |               |    |                              |    |          |      |
| CAT50          | PLCNC-AAH-ER32-CAT50      | 45963          |        |       |                  |            | 1.457          | 37   |             |                        |    |               |    |                              |    |          |      |

CNC Adjustable Angle Heads with HSK shanks can be made as a special order upon request.

\*\* The weights of the angle heads do not include spindle taper holders.  
\* Use with Dorian Slotting Cutter Holder PG 14.