



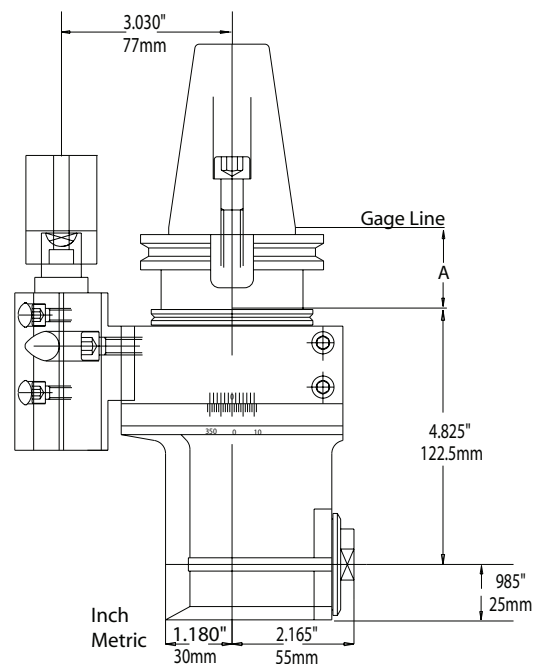

90° CNC Adjustable Angle Head

90CNC-AAH16

- 4000 RPM max.
- ER16 Collet System
- Fixed 90° angle head with 0- 360° circular rotation
- Interchangeable spindle taper holder for CAT, ISO & BT Spindles
- Designed for precision machining for small to medium tool applications

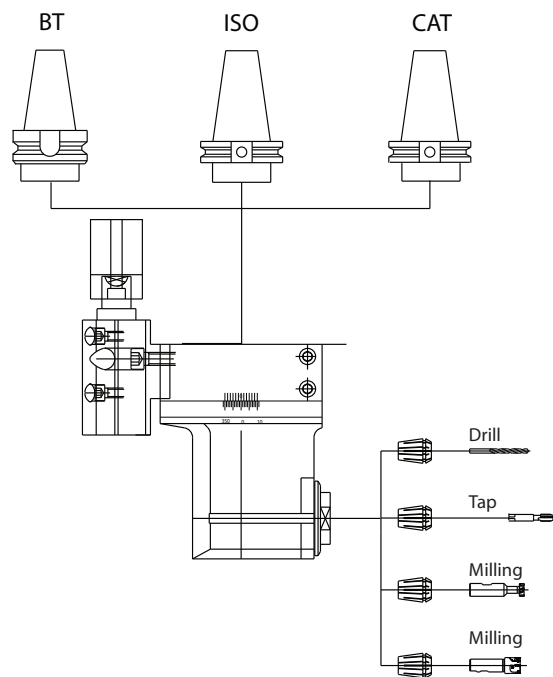

Shank Style	Description	UPC 733101-	Torque		Driving Ratio	Max RPM	A Gage Line		Collet Size	Tool Cap. Dia.		Max. Tap Size		*Max Slotting Cutter I.D.		** Weight	
			Nm	lb.ft			in	mm		in	mm	in	mm	in	mm	Kg	Lb
ISO40-DIN2080	90CNC-AAH-ER16-40DIN2080	45965	6.5	4.8	1 to 1	4000	0.520	13.2	ER16	0.375	10	0.312	8	-	-	6.5	14.3
ISO40-DIN69871	90CNC-AAH-ER16-40DIN69871	45966					1.378	35									
BT40	90CNC-AAH-ER16-BT40	45967					1.457	37									
CAT40	90CNC-AAH-ER16-CAT40	45968					1.378	35									
ISO50-DIN2080	90CNC-AAH-ER16-50DIN2080	45969					0.724	18.4									
ISO50-DIN69871	90CNC-AAH-ER16-50DIN69871	45970					1.457	37									
BT50	90CNC-AAH-ER16-BT50	45971					2.047	52									
CAT50	90CNC-AAH-ER16-CAT50	45972					1.457	37									

CNC Adjustable Angle Heads with HSK shanks can be made as a special order upon request.

** The weights of the angle heads do not include spindle taper holders.
* Use with Dorian Slotting Cutter Holder PG 14.