



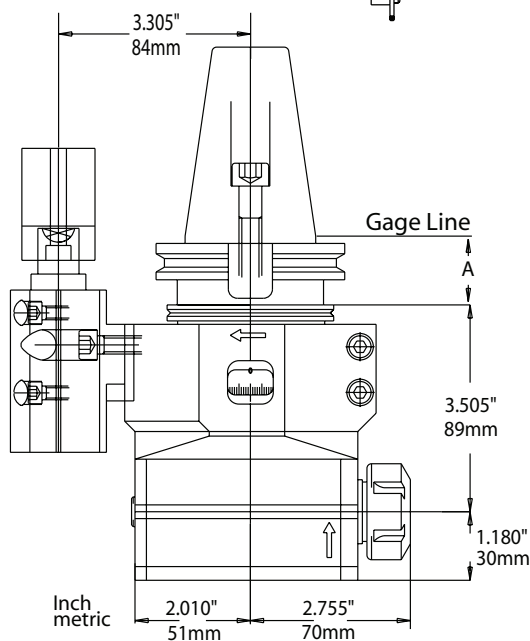

90CNC-AAH25

- 3500 RPM max.
- ER25 Collet System
- Designed to perform any CNC medium duty operations
- Fixed 90° angle head with 0-360° circular rotation
- Interchangeable spindle taper holder for CAT, ISO & BT Spindles

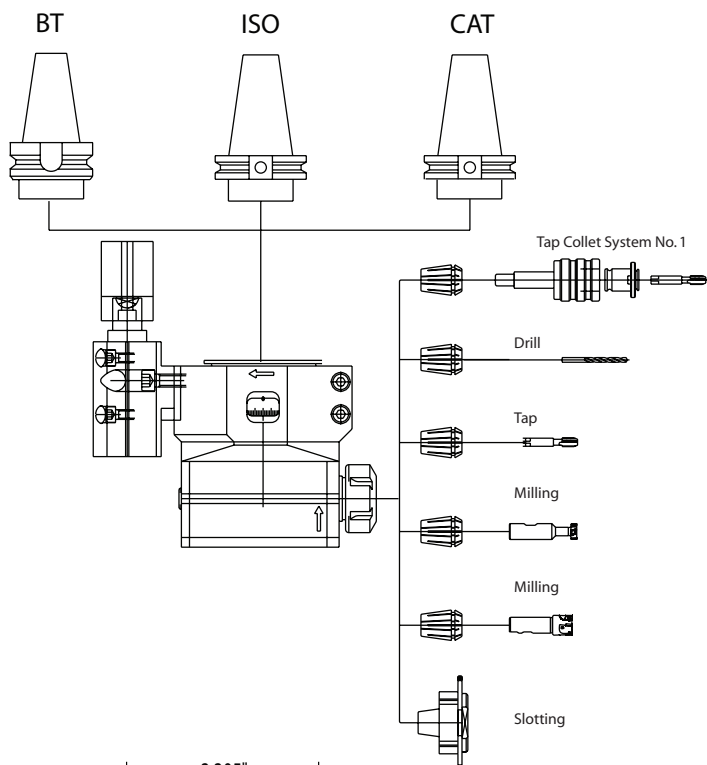

Shank Style	Description	UPC 733101-	Torque		Driving Ratio	Max RPM	A Gage Line		Collet Size	Tool Cap. Dia.		Max. Tap Size		*Max Slotting Cutter I.D.		** Weight	
			Nm	lb.ft			in	mm		in	mm	in	mm	in	mm	Kg	Lb
ISO40-DIN2080	90CNC-AAH-ER25-40DIN2080	45974	20	14.7	1 to 1	3500	0.520	13.2	ER25	0.625	16	0.625	16	1.250	32	6.5	14.3
ISO40-DIN69871	90CNC-AAH-ER25-40DIN69871	45975					1.378	35									
BT40	90CNC-AAH-ER25-BT40	45976					1.457	37									
CAT40	90CNC-AAH-ER25-CAT40	45977					1.378	35									
ISO50-DIN2080	90CNC-AAH-ER25-50DIN2080	45978					0.724	18.4									
ISO50-DIN69871	90CNC-AAH-ER25-50DIN69871	45979					1.457	37									
BT50	90CNC-AAH-ER25-BT50	45980					2.047	52									
CAT50	90CNC-AAH-ER25-CAT50	45981					1.457	37									
CNC Adjustable Angle Heads with HSK shanks can be made as a special order upon request.																	