



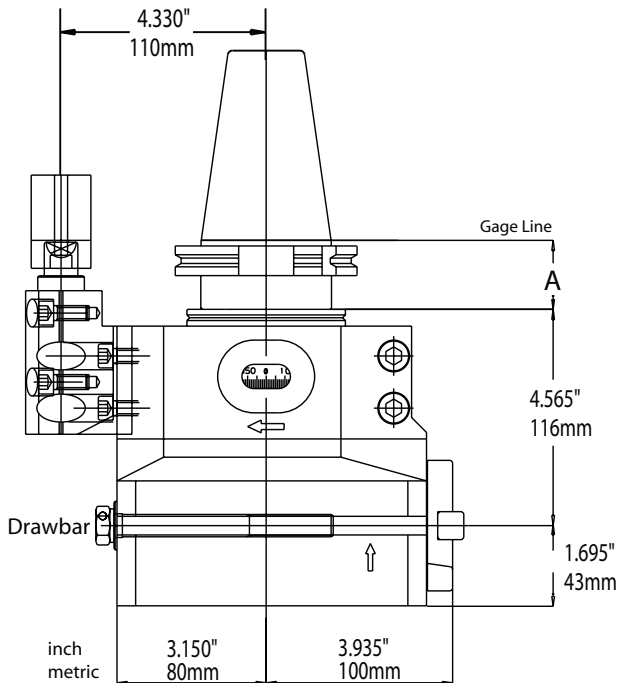

90CNC-AAH-TAPER40

- 2000 RPM max.
- Engineered to accept any CAT, ISO, or BT-40 taper holder
- Designed to perform any CNC heavy duty operations
- Fixed 90° angle head with 0-360° circular rotation
- Interchangeable spindle taper holder for CAT, ISO & BT Spindles

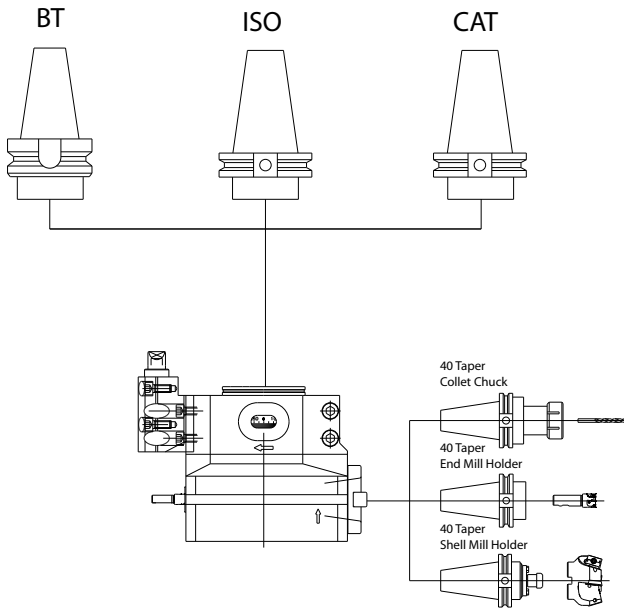

Shank Style	Description	UPC 733101-	Torque		Driving Ratio	Max RPM	A Gage Line		Output	* Weight	
			Nm	lb.ft			in	mm		Kg	Lb
ISO40-DIN2080	90CNC-AAH-TP40-40DIN2080	45933	40	29.5	1 to 1	2000	0.520	13.2	ISO40 CAT40 BT40	20	44
ISO40-DIN69871	90CNC-AAH-TP40-40DIN69871	45934					1.378	35			
BT40	90CNC-AAH-TP40-BT40	45935					1.457	37			
CAT40	90CNC-AAH-TP40-CAT40	45936					1.378	35			
ISO50-DIN2080	90CNC-AAH-TP40-50DIN2080	45993					0.724	18.4			
ISO50-DIN69871	90CNC-AAH-TP40-50DIN69871	45994					1.457	37			
BT50	90CNC-AAH-TP40-BT50	45995					2.047	52			
CAT50	90CNC-AAH-TP40-CAT50	45996					1.457	37			

CNC Adjustable Angle Heads with HSK shanks can be made as a special order upon request.

* The weights of the angle heads do not include spindle taper holders.