





# Perfetta™ Heavy Duty Live Center with Interchangeable Point

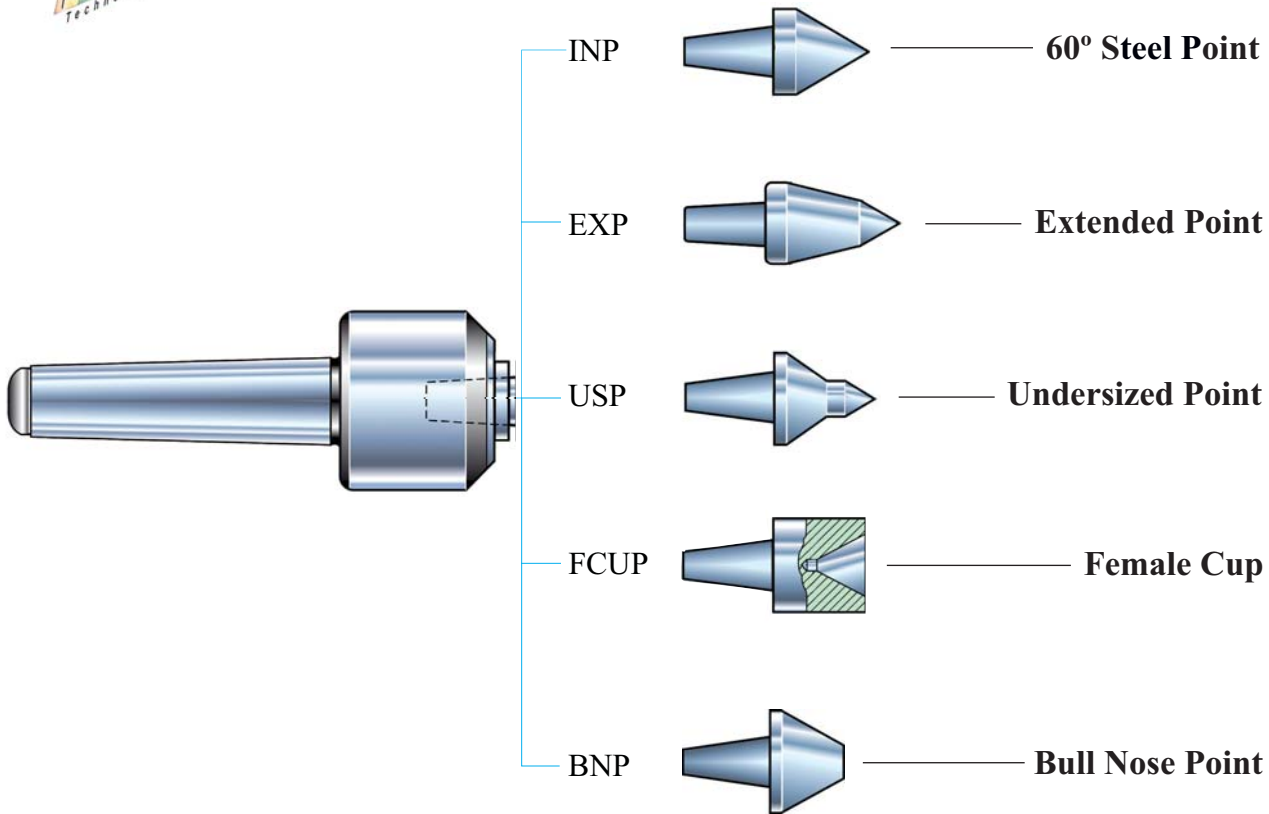

For a full range of center points see pages 13-14.

## Heavy Duty Live Center with 60° Interchangeable Point

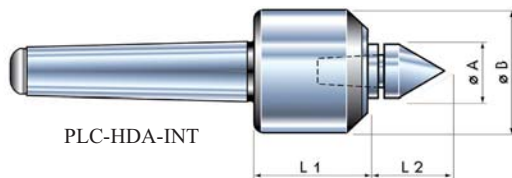

For Extraction Point Wrench NOT Supplied see page 14.

Heavy Duty Live Center With Interchangeable Point		Specifications								
UPC 733101-	Description	A	B	L1	L2	Morse Taper	Weight (lb)	Max. RPM	Max. workpiece weight (lb)	Thrust load (lb)
48214	PLC-HDA-INT-MT2	0.99	2.01	1.69	1.38	2	1.98	7500	506	1012
48215	PLC-HDA-INT-MT3	0.99	2.17	1.69	1.42	3	2.20	6000	2090	1144
48216	PLC-HDA-INT-MT4	1.14	2.40	2.01	1.58	4	3.52	4500	3300	1320
48217	PLC-HDA-INT-MT5	1.38	3.15	2.32	1.89	5	7.70	2800	4400	2640
48218	PLC-HDA-INT-MT6	1.65	4.26	3.47	2.17	6	22.00	200	10560	3300
48219	PLC-HDA-INT-MT6-S	1.65	5.44	4.57	2.40	6-S	26.40	1700	19800	6600