




No. D41-CNC

Extra Heavy Duty Boring Bar Toolholder Inch/Metric

This holder is best used for holding boring bars. It has four flat-face locking-screws that automatically align the center height and rake angle of the boring bar while locking it rigidly for chatter-free machining. Flat-face locking-screws do not scar the boring bar. This holder reduces setup time by eliminating the need to indicate across the boring bar flat. Fits industry standard tool posts.

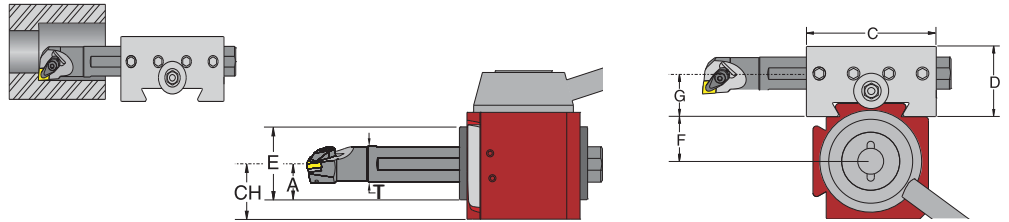


SDN Description	Part No.733101-	Size	A	T	C	D	E	F	G
D25AXA-41-CNC	01114	in	.870	1.000	2.750	1.740	1.740	.880	1.062
D25AXA-41M-CNC	01116	mm	22.10	25	69.85	44.20	44.20	22.35	26.97
D30BXA-41-CNC	01264	in	1.120	1.250	3.250	2.240	2.240	1.115	1.375
D30BXA-41M-CNC	01266	mm	28.45	32	82.55	56.90	56.90	28.32	34.93
D35CXA-41-CNC	01414	in	1.120	1.250	3.750	2.240	2.240	1.199	1.375
D35CXA-41M-CNC	01416	mm	28.45	32	95.25	56.90	56.90	30.45	34.93
D40CA-41-CNC	01564	in	1.245	1.500	4.500	2.490	2.490	1.530	1.500
D40CA-41M-CNC	01566	mm	31.62	40	114.30	63.25	63.25	38.86	38.10
D50DA-41-CNC	01714	in	1.745	2.000	5.500	3.490	3.490	1.900	2.250
D50DA-41M-CNC	01716	mm	44.32	50	139.70	88.65	88.65	48.26	57.15
D60EA-41-CNC	01864	in	1.995	2.500	6.500	3.990	3.990	2.207	2.375
D60EA-41M-CNC	01866	mm	50.67	60	165.10	101.35	101.35	56.06	60.33

No. D41S-CNC

Super Oversized Boring Bar Toolholder Inch/Metric

This holder is best used for holding boring bars. It has four flat-face locking-screws that automatically align the center height and rake angle of the boring bar while locking it rigidly for chatter free machining. Flat-face locking-screws do not scar the boring bar. This holder reduces setup time by eliminating the need to indicate across the boring bar flat. Fits industry standard tool posts.

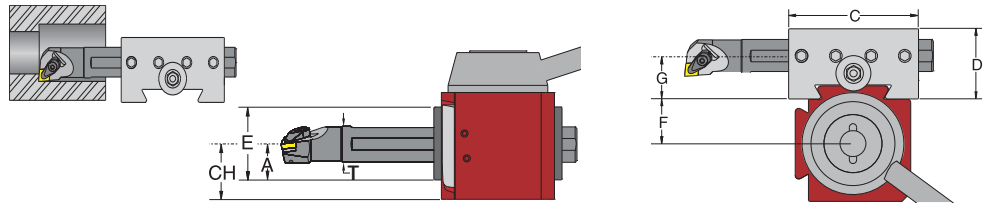


SDN Description	Part No.733101-	Size	A	T	C	D	E	F	G
D35CXA-41-150-CNC	01418	in	1.245	1.500	4.000	2.490	2.490	1.199	1.500
D35CXA-41M-40-CNC	01420	mm	31.62	40	101.60	63.25	63.25	30.45	38.10
D40CA-41-200-CNC	01568	in	1.495	2.000	4.500	2.990	2.990	1.530	1.750
D40CA-41M-50-CNC	01570	mm	37.97	50	114.30	75.95	75.95	38.86	44.45
D50DA-41-250-CNC	01718	in	1.995	2.500	6.500	3.990	3.990	1.900	2.250
D50DA-41M-60-CNC	01720	mm	50.67	60	165.10	101.35	101.35	48.26	57.15
D60EA-41-300-CNC	01868	in	2.245	3.000	7.000	4.490	4.490	2.207	2.625
D60EA-41M-80-CNC	01870	mm	57.02	80	177.80	114.05	114.05	56.06	66.68

No. D41-COL

Extra Heavy Duty Boring Bar Toolholder Inch/Metric

This holder is best used for holding boring bars. It has a precision ground bore with a 360° locking system providing the best rigidity in metal removing without scarring the boring bar. Fits industry standard tool posts.

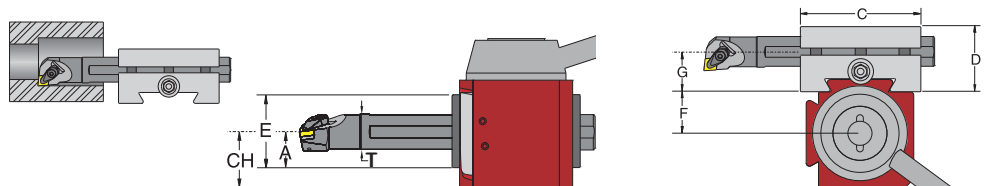

SDN Description	Part No.733101-	Size	A	T	C	D	E	F	G
D35CXA-41-COL	01460	in	1.045	1.250	3.750	2.240	2.240	1.999	1.375
D40CA-41-COL	01608	in	1.170	1.500	4.500	2.490	2.490	1.530	1.500
D50DA-41-COL	01752	in	1.745	2.000	5.500	3.490	3.490	1.900	2.250
D60EA-41-COL	01896	in	1.995	2.500	6.500	3.990	3.990	2.207	2.375