




Perfetta™ CNC High Speed Heavy Duty Live Center

CNC High Speed Heavy Duty Live Center with Interchangeable Point

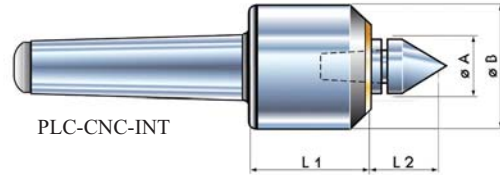


For Extraction Point Wrench NOT Supplied see page 14.


CNC High Speed Heavy Duty Live Center with Interchangeable Point		Specifications								
UPC 733101-	Description	A	B	L1	L2	Morse Taper	Weight (lb)	Max. RPM	Max. workpiece weight (lb)	Thrust Load (lb)
48228	PLC-CNC-INT-MT3	0.99	2.17	1.85	1.46	3	2.20	7000	1386.00	1144.00
48229	PLC-CNC-INT-MT4	1.14	2.40	2.17	1.60	4	3.63	5500	1883.20	1438.80
48230	PLC-CNC-INT-MT5	1.38	3.15	2.48	1.81	5	7.81	4500	2860.00	2486.00
48231	PLC-CNC-INT-MT6	1.65	3.66	2.88	2.17	6	18.70	3200	3740.00	2508.00

For 6 piece SET and a full range of center points see pages 12-14

CNC High Speed Heavy Duty Live Center with Extended Point

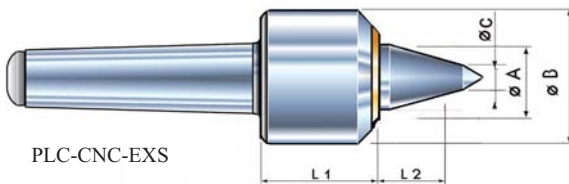

CNC High Speed Heavy Duty Live Center with Extended Point & Carbide Tip

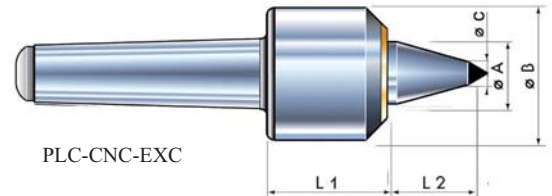

CNC High Speed Heavy Duty Live Center with Extended Point & Steel Tip		CNC High Speed Heavy Duty Live Center with Extended Point & Carbide Tip		Specifications									
UPC 733101-	Description	UPC 733101-	Description	A	B	C	L1	L2	Morse Taper	Weight (lb)	Max. RPM	Max. workpiece weight (lb)	Thrust load (lb)
48232	PLC-CNC-EXS-MT3	48236	PLC-CNC-EXC-MT3	0.87	2.17	0.24	1.85	1.65	3	2.20	7000	1210	1144
48233	PLC-CNC-EXS-MT4	48237	PLC-CNC-EXC-MT4	1.14	2.40	0.32	2.17	2.01	4	3.63	5500	1650	1439
48234	PLC-CNC-EXS-MT5	48238	PLC-CNC-EXC-MT5	1.50	3.15	0.39	2.48	2.21	5	7.81	4500	2640	2486
48235	PLC-CNC-EXS-MT6	48239	PLC-CNC-EXC-MT6	1.65	3.66	0.47	2.88	3.47	6	18.70	3200	3300	2508